

See us for all of your replacement pivot parts needs such as: pressure regulators, end guns, booster pumps, u-joints, gear boxes, center drives, drops, goosenecks, hose, microswitches, electrical, wheels & tires.

PIVOT DRIVE COUPLER ASSEMBLY




1" round x 1" square (Old Style Valley, Gifford Hill)	6-1531	2.5	15.50
1" round x 7/8" square (New Style Valley)	6-1532	2.5	15.50
1" round x 3/4" square (Gifford Hill, Olson, Lindsay, Electrogator)	6-1533	2.5	15.50
1" round w/kw x 3/4" square (Old Style Lockwood)	6-1534	2.5	15.50
1" round w/kw x 1" square (New Style Lockwood)	8-1422	2.5	16.00
1 1/8" round x 3/4" square	8-1423	2.5	16.00
1 1/8" round x 1" square (Gifford Hill)	8-1424	2.5	16.00
Puck Only	2-0046		3.50

Features:

1. Clover leaf style with live rubber insert absorbs shock and reduces wear on driveline components.
2. Casting design holds bolt in place and requires only one wrench to install.
3. Aluminum alloy and five piece design makes this "U-Joint" easy to install or remove. No more rust.

UNIVERSAL DRIVE LINE COUPLING

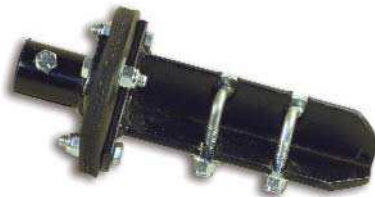

1" Round x 1", 7/8", 3/4"	--	Call
Rubber Disc Only	--	Call

Features:

1. The rubber disc absorbs shock from gearmotors to wheel drive.
2. The ends can be ordered to fit most any center pivot drive line.
3. The round end is split for easy installation and a tight fit.
4. The disc design allows for some misalignment on the drive line.
5. The units are Made in the USA using top materials.
6. The rubber disc is 5" in diameter, all hardware is grade 5.

DRAINS

Quick Drain

Lindsay Type, 20-75 psi	2-1183	4.00
Lindsay Type, 5-30 psi	2-1184	4.00

Drain Valve

Star, Plastic	--	20.00
Star, Metal	2-1182	20.00




Plastic





Metal


CENTER PIVOT PARTS




Product	Description	Part Number	Weight	List Price
PIVOT RUBBER BOOT 	4 PLY			
	6 5/8" x 16" long	7.01" OD 6-1535	3.5	28.00/ea
	6 5/8" foot	7.01" OD 6-9580		21.00/ft
	7" x 16" long	2-1270		59.00/ft
	8" x 12" long	2-1271		39.00/ft
	8-5/8" x 16" long	2-1272		45.00/ft
	2 PLY			
	6"/foot	6.38" OD 6-9576		14.00/ft
	6 5/8"/foot	7.01" OD 6-9577		17.00/ft
	8"/foot	8.46" OD 6-9578		25.00/ft
10"/foot	10.63" OD 6-9579		32.00/ft	

Product	Description	Part Number	Weight	List Price
PIVOT CLAMP 	4-1/2" Stainless Steel	2-1275	0.5	11.00
	5" Stainless Steel	2-1276		11.00
	6" Stainless Steel	2-1278		13.00
	6 5/8" Stainless Steel	6-1536		7.50
	7" Stainless Steel	2-1279		14.00
	8" Stainless Steel	6-9581		15.50
	8-5/8" Stainless Steel	2-1280		17.00
	9" Stainless Steel	--		17.00
	10" Stainless Steel	2-1281		17.00

Product	Description	Part Number	List Price
PIVOT T FLANGE GASKET 	5-9/16"	2-1317	4.00
	6" (5" id x 8" od)	9-5436	8.50
	6-5/8" (6-5/8" id x 8" od)	9-5437	6.00
	8", Lindsay Style	2-1319	10.00


Product	Description	Part Number	Weight	List Price
PIVOT WEIGHT 	15" Polyethelene	6-9548	1.0	3.00
	20" Polyethelene	6-9549	1.4	3.50
	24" Polyethelene	6-9550	1.5	5.00
	30" Polyethelene	6-9551	2.0	6.00
	10" PVC (w/ fpt xfpt)	6-9552	2.0	5.00
	11" PVC (w/ fpt xfpt)	6-9553	2.0	7.00
	13.75" PVC (w/ fpt xfpt)	6-9554	2.5	6.00
16.5" PVC (w/ fpt xfpt)	6-9555	3.1	8.00	

- Ends of pipe are rounded for attractive appearance and functionality
 - Strong UV inhibitors added to weight for longevity

Product	Description	Part Number	Weight	List Price
DROP ELBOW 	Single, Steel Galv:			
	3/4", MxF	6-6702	--	5.00
	3/4" MxM	2-1412	--	4.00
	Single, PVC:			
	125 Degree, 3/4" FPT x Barb	2-1086	--	3.00
	125 Degree, 3/4" FxM	2-1088	--	3.00
	180 Degree, 3/4" FPT x Barb	--	--	5.70
	180 Degree, 3/4" MXF	2-1418	--	5.70
	180 Degree, 3/4" MXM	2-1417	--	5.70
	180 Degree, 3/4" MPT x Barb	2-1419	--	5.70
	Double, PVC:			
	125 Degree, 3/4" FPT x Barb	--	--	5.00
	125 Degree, 3/4" FxM	2-1408	--	5.00

- U Pipes have 6" radius
 - M x M configuration is available
 - PVC Drop Elbow has strong UV inhibitors for year round use.

DROP RISER, 3/4" M X F



- Galvanized steel for long life.

Galvanized:			
24"	---		Call
30"	2-1436		Call
36"	2-1437		Call
42"	2-1438		Call
48"	2-1439		Call
54"	2-1440		Call
60"	2-1441		Call
66"	2-1442		Call
72"	2-1443		Call
78"	2-1444		Call
84"	2-1445		Call
90"	2-1446		Call
96"	2-1447		Call
102"	2-1448		Call
108"	--		Call
114"	--		Call
120"	--		Call

DROP RISER, 3/4" M X F



- Strongest clamp on the market, 100% guaranteed.
- Strong UV inhibitors for year round use.
- These heavy duty drops are made from top quality polyethylene materials and the heaviest duty clamp on the market. These drops are engineered to withstand tough use conditions and are perfect for use in areas with corrosive water.

Poly PVC:			
24"	--		Call
30"	--		Call
36"	--		Call
42"	--		Call
48"	--		Call
54"	--		Call
60"	--		Call
66"	--		Call
72"	--		Call
78"	--		Call
84"	--		Call
90"	--		Call
96"	--		Call
102"	--		Call
108"	--		Call
114"	--		Call
120"	--		Call

END GUN BOOSTER PUMP (MOTOR & PUMP)



- All Parts are interchangeable with Berkeley Model #C2MPS
- With Leeson 2-HP (TEFC) 3-phase Motor, 460 volt

2-HP, 130 GPM (2-1/2" Suction x 2" Discharge)	2-1106	69	900.00
--	--------	----	--------

END GUN BOOSTER PUMP (COMPONENTS)



Volute Case	2-1115	161.00
Motor Bracket	2-1111	140.00
Cast iron Impeller	2-1113	88.00
Brass Impeller	2-1559	112.00
Stainless Steel Impeller	2-1560	112.00
Motor Bracket Gasket	2-1110	2.40
Volute Gasket	2-1114	4.40
Impeller Spacer	2-1561	8.00
Mechanical Seal	2-1112	14.00

Fittings

END GUN BOOSTER PUMP (MOTOR ONLY)



2-HP (TEFC) 3-phase, 460V	2-1118	33	595.00
---------------------------	--------	----	--------

CENTER PIVOT PARTS



Product	Description	Part Number	Weight	List Price
---------	-------------	-------------	--------	------------

GEAR BOX, UNIVERSAL DRIVE, NON-TOW



52:1 Gearbox, Valley Style
50:1 Gearbox, Universal


2-1341
2-0197

Call
Call

Features

1. Heavy-Duty gearbox with universal mounting.
2. Totally enclosed internal air expansion chamber.
3. High tensile strength worm shaft.
4. Most durable worm gear available.
5. One-piece high strength output shaft.
6. Heavy-duty taper roller bearings.
7. Extreme-duty ductile iron endcaps.
8. New self-contained cartridge style input and output shaft seals eliminating oil leaks.
9. Plates seal cover for protection of unused input shaft

HELICAL GEAR MOTORS



34 RPM, 50:1, 3/4 HP
43 RPM, 40:1, 3/4 HP
68 RPM, 25:1, 1-1/2 HP
86 RPM, 20:1, 1-1/2" HP

2-0206
2-0205
2-0204
2-0203

Call
Call
Call
Call

Features

1. 460/380 Volt, 3 phase motor, 60/50 hz
2. Motor is thermally protected with automatic reset.
3. Class F2 Insulation, UL & CSA Certified.
4. Corrosion resistant finned aluminum motor frame.
5. Aluminum motor frame is sealed at junction points.
6. Integral heat-treated pinion gear on motor shaft.

STATOR ASSEMBLIES



3/4 Horse Power
1-1/2 Horse Power


2-0207
2-0208

Call
Call

Features

1. 460/380 Volt, 3 phase motor, 60/50 hz
2. Available in 3/4 and 1-1/2 HP models
3. Class F insulation.
4. Totally interchangeable with Valmont Stators.
5. Includes the 4 mounting bolts, strain relief and wire nuts.
6. Aluminum motor frame resists corrosion.

CENTER DRIVE, "C" FACE



1-1/2 HP

Call

DRIVE LINE COUPLING BELL ENDS & DRIVE SHAFT SHIELDS



Bell end, Black, 7/8"	2-0287	8.00
Bell end, Grey, 3/4"	2-0286	8.00
Cover, Grey, 7/8" (Specify Length)	--	Call
Cover, Black, 3/4" (Specify Length)	--	Call

Features

1. Durable, high quality plastic drive coupler shields (bell end) will not crack like the competition, Made in USA
2. Color coded based on the drive shaft size. Black bell end for 3/4" and Grey for 7/8".
3. Drive shaft shields are also color coded for easy identification. Black for 3/4" and Grey for 7/8" drive shafts
4. Clamps are not needed to hold the bell ends and shaft covers in place.
5. The units are Made in the USA using top materials.
6. Drive shaft covers are available in custom lengths, please specify.

GEARMOTOR



58:1 ratio, 30 RPM, 1 HP motor	2-0221	Call
47:1 ratio, 37 RPM, 1 HP motor	2-0224	Call
39:1 ratio, 45 RPM, 1 HP motor	2-0220	Call
31:1 ratio, 56 RPM, 1-1/2 HP motor	2-0223	Call
21:1 ratio, 84 RPM, 1-1/2 HP motor	2-0222	Call

Features

1. 460/380 Volt, 3 Phase, 60/50 hz
2. Special CorroGuard insulation for longer motor life.
3. Stainless steel motor frame for corrosion resistance.
4. Motor is thermally protected.
5. Splined motor/gearbox design.

MOTOR



1 HP, 460/380 Volt, 60/50 hz	--	Call
1-1/2 HP, 460/380 Volt, 60/50 hz	--	Call

Features

1. Top quality gear motor from the most experienced American mfg of center pivot gear motors.
2. Designed to operate in extreme environments. The gear motor has a corrosion resistant housing and incorporates an inherent overload protection for the motor.
3. Simplicity, flexibility and reliability.
4. 100% of all motors are factory tested before packaging.

GEAR BOX



58:1 ratio, 30 RPM	2-0240	Call
47:1 ratio, 37 RPM	2-0239	Call
39:1 ratio, 45 RPM	2-0238	Call
31:1 ratio, 56 RPM	2-0235	Call
21:1 ratio, 84 RPM	2-0234	Call

Features

1. Splined design for the motor/gearbox connection.
2. Aluminum gearbox case.

CENTER PIVOT PARTS



Product	Description	Part Number	Weight	List Price
---------	-------------	-------------	--------	------------

NEMA C56 MOTOR



1 HP, 1800 RPM, US Motor	2-0262	Call
1-1/2 HP, 1800 RPM, Franklin Motor	2-0261	Call

Features

1. Fits on any NEMA 56 C flanged center drive gearbox
2. Stainless steel motor frame for corrosion resistance.
3. CorroGuard insulation for longer motor life.
4. Motor is thermally protected

NEMA C56 MOTOR, GE MOTORS



1 HP, 1725 RPM	2-0258	Call
1-1/2 HP, 1725 RPM	2-0259	Call

Features

1. Totally enclosed fan cooled design.
2. Bearings are double sealed and grease packed.
3. Class F insulation.
4. Motor is thermally protected
5. Heavy duty plastic cooling shroud and fan cover are corrosion resistant.

UNIVERSAL NEMA C56 CENTER DRIVE GEAR-BOX



30:1 ratio	2-0251	Call
40:1 ratio	--	Call
50:1 ratio	2-0252	Call
60:1 ratio	2-0253	Call

Features

1. Universal mounting pattern.
2. Multiple available ratios available.
3. Aluminum gearbox housing.
4. Includes keyway coupling for the motor to gearbox connection.
5. Includes 2 seal savers for the output shafts.
6. High strength aluminum bronze bull gear.

PIVOT OR END TOWER LIGHT KIT



Rough duty light bulb kit, Complete	2-0536	Get
TOMAR Strobe light kit, Complete	2-0538	Get
Globe and pendant, 3/4" Fem	2-0549	Get
Globe and pendant, 1/2" Fem	2-0550	Get
Rough Duty Light, 75 watt	2-0547	Get
Screw in Strobe Light (Red, Green, Amber, Blue, Clear)	2-0543	Get

Universal light kit for installation at the pivot point or end tower. The kit comes complete with the flange adapter, extended gooseneck, shielded cable, globe assembly, and rough duty light assembly or TOMAR strobe light.

PIVOT TIRES



11.2 x 38 - 6 ply, Tire with tube, Mounted	2-0327	Call
14.9 x 24 - 6 ply, Tire with tube, Mounted	2-0325	Call
11.2 x 24 - 6 ply, Tire with tube, Mounted	2-0324	Call
11.2 x 38 - 6 ply, Tire only	2-0336	Call
14.9 x 24 - 6 ply, Tire only	2-0334	Call
11.2 x 24 - 6 ply, Tire only	2-0333	Call
10 x 38 Galv. wheel, Standard & Vally offset	--	Call
10 x 24 Galv. wheel, Standard offset	--	Call
12 x 24 Galv. wheel, Valley offset	--	Call
8 x 24 Galv. wheel, Standard offset	--	Call
8 x 24 Galv. wheel, Valley offset	--	Call

Features

1. All tires are 6 ply rated and tube type.
2. R-1 Irrigation tread.
3. Tire and wheel assemblies are mounted left and right, please specify
4. Wheels are hot dipped galvanized.
5. Unique valve stem guard protects the valve stem from field debris.
6. Available in both Standard and Valley style offset.

SWITCH BOXES, FUSIBLE DISCONNECT, GE



3-Pole, 600 Volt		
100 AMP, TGN3 ground lug kit	--	Call
200 AMP, TGN3 ground lug kit	--	Call
300 AMP, TGN3 ground lug kit	--	Call
60 AMP, TGN3 ground lug kit	--	Call
30 AMP, Standard rigid enclosure	--	Call

Features

1. The 30amp G.E. Disconnect Switch is an oversized enclosure.
2. Includes the heavy duty fusible switch, fuses are not included.
3. Includes the TBN3 Ground lug Kit.
4. The oversized enclosure allows for easy hook up on higher guage wire.
5. The oversized enclosure allows room for other electrical components.


FUSES



1.125 amp, 500 Volts	2-0709	Call
2 amp, 500 Volts	2-0719	Call
3 amp, 500 Volts	2-0731	Call
4 amp, 500 Volts	2-0742	Call
5 amp, 500 Volts	2-0748	Call
8 amp, 500 Volts	2-0766	Call
15 amp, 500 Volts	2-0778	Call
12 amp, 500 Volts	2-0775	Call
30 amp, 500 Volts	2-0790	Call
12 amp, 600 Volts	2-0776	Call
15 amp, 600 Volts	2-0779	Call
20 amp, 600 Volts	--	Call
25 amp, 600 Volts	2-0788	Call
30 amp, 600 Volts	2-0791	Call
40 amp, 600 Volts	2-0795	Call
50 amp, 600 Volts	2-0799	Call
70 amp, 600 Volts	2-0803	Call

Fittings

FUSE HOLDER



1 pole, 9-8923-6	2-0839	Call
2 pole, 9-8870-9, 314177	2-0840	Call
3 pole, CCMR Fuse	2-0841	Call
1 pole, AGC Type Fuse	--	Call

Product	Description	Part Number	Weight	List Price
---------	-------------	-------------	--------	------------

LIGHTNING ARRESTOR



Lightning Arrestor, 600 V

2-0857

Call

SURGE SUPPRESSOR



With Forks, L40-136
Universal, 9-9341-0, 315663

--

Call

--

Call

BRIDGE DIODE



Bridge Diode, L40-740

--

Call

PERCENTAGE TIMER



Eagle, 60 second, 9-7650-6
Eagle, 30 second
ATC, Electronic, 60 second
ATC, Electronic, 30 second
Eagle, 30 second
Eagle, 60 second

2-0664

2-0665

--

--

--

--

--

Call

Call

Call

Call

Call

Call

OVERWATERING TIMER



Eagle, 0-5 minute, 9-7262-2
Eagle, 0-60 minute, Motor Drive, 317708
Eagle, 0-60 minute, Electronic, 317708
Eagle, 0-30 minute, Electronic

--

--

--

--

Call

Call

Call

Call

PRESSURE SWITCH



ASCO, H series, 10-90 psi (w/enclosure)
Universal, 10-90 psi
Barksdale, 10-250 psi
Barksdale, 0-90 psi
Barksdale, 0-20 psi
NASON, 6-30 psi, SQ-2

--

--

--

--

--

--

Call

Call

Call

Call

Call

Call

**RESISTOR/CAPACITOR/
 DIODE ASSMBLY**



Resistor/capacitor/Diode Assy. 3-6905-8 -- Call

TERMINAL STRIP



6 Point -- Call
 8 Point -- Call
 12 Point, 9-7602-7 -- Call

GROUND LUG/BAR



Ground bar, Solderless, TA-2 -- Call
 GE Ground lug, 9 point, TNG1 -- Call
 Ground Bar, TGL2 -- Call
 Ground Bar, 11 point -- Call
 Ground Bar, 7 point -- Call

LIMIT SWITCH



Windmill Style, 360 degrees -- Call
 Double Brake, 1811451 -- Call
 Cat Whisker, 9-7244-8 -- Call
 Spring return, End gun (not pictured) L640-58 -- Call
 Actuator, Rod, 13" Redius, L432-185 -- Call
 Actuator, Windmill, 4 spokes -- Call
 Actuator, Windmill, 8 spokes -- Call
 Actuator, Roller lever (not pictured) -- Call

TOGGLE SWITCH



2-Position, on/off, SPST -- Call
 Spring return, on/off, DPDT -- Call
 On/On, DPDT -- Call
 3-Position, on/off/on, DPDT -- Call

MICRO SWITCH



Short arm, Basic -- Call
 Long arm, 9-9030-9 -- Call
 Short arm, HYDRUS -- Call
 Short arm, Adjustable, Black, 314559 -- Call
 Short arm, Adjustable, Brown, Valley Style -- Call
 Short arm, Wire alignment L640-76 -- Call
 Short arm, Non-wire alignment, L640-63 -- Call
 Short arm, Non-wire alignment, L640-148 -- Call
 Long arm, Roller -- Call
 Short arm, Gifford Hill/TUMAC -- Call

Fittings

Product	Description	Part Number	Weight	List Price
---------	-------------	-------------	--------	------------

TOWER DISCONNECT SWITCH



Tower Disconnect, 9-8866-7 / 7-9140-6	--	Call
Tower Disconnect Switch	--	Call
Tower Disconnect Switch, Universal	--	Call

RELAYS



Latching, 11 pin, 120V, 10A, 9-8955-8	--	Call
Ice cube, 8 blade, 12VDC, 120V, 10A, L40-741	--	Call
Ice cube, 8 blade, 110VDC, 600V, 10a, 315559/10-0162-7	--	Call
Ice Cube, 9 blade, 120VZC, 25A, 10-0161-9	--	Call
Power, SPDT, 24VAC, 25A, 9-8890-7	--	Call
Power, SPDT, 120VAC, 25A, 9-9142-2	--	Call
Power, DPST, 1HP, 120VAC, 25A, 9-9179-4	--	Call
Power, DPDT, 120VAC, 30A, 314727	--	Call
RBM, Lindsay	--	Call
General Purpose, L40-344	--	Call
120VAC, 314936	--	Call

SOCKETS



Socket, 8 pin	--	Call
Socket, 11 pin	--	Call
Socket, 11 Blade	--	Call
Socket, 11 Blade (other info?)	--	Call

CONTACTORS



GE, 3 pole, 25A, 120V, 9-0866-5 L40-602 314598	--	Call
GE, 4 pole, 30 A, 120V, 9-0860-8	--	Call
GE, 4 pole, 30A, Fwd/Rev 99P013, 9-0860-0	--	Call
ACI, 4 pole, 2NO & 2NC	--	Call

TRANSFORMER



480x120V, .375 KVA, L844-4	--	Call
480x120V, w/24VDC Tap, .5KVA 314977, 9766-2	--	Call
480/380x120V, 60/50 hz, Export	--	Call
Safety, 16-24VDC, L844-20/844-9, 9-8889-9	--	Call

VOLTMETER




0-600 Volts, 3-1/2", 314979	2-0699	Call
0-600, 2-1/2", Lindsay Style	--	Call

HOURMETER



Round, 9-9132-3, 314442	--	Call
Round, Quartz	--	Call

SOIL MOISTURE TESTER



Irrrometer:	6"	6-1504	0.8	118.00
	12"	6-1508	1.0	122.00
	18"	6-1509	1.1	127.00
	24"	6-1516	1.2	132.00
	36"	6-1517	1.5	142.00
	48"	6-1518	1.7	151.00
Service Unit		6-1519	1.1	80.00

Recommended by the soil conservation departments of the USDA and local water conservation districts as an easy tool to prevent over-watering
Optional service kit is required with the first installation of a tensiometer.
This unit is not recommended for areas where the instrument could get easily hit or where there are a lot of stones in the soil.

Features:

- 5 different lengths to choose from
- Only the gauge is replaceable
- Conserves water
- Saves energy from pumping excessive water

SCREEN, INLINE

Stainless Steel (24 ga.)



Features:

- Keeps sprinkler heads from plugging
- Makes couplers easier to connect and disconnect
- Works with large volumes of water up to 1000 gallons per minute.
- Collects large amounts of sand, gravel, and debris without cleaning.

*Hole size = 3/32" (.09375"). Special order available on smaller .05" hole size.

Size	Outside Diameter of inlet of Screen			Length	Part #	Weight	List Price
	BE-Bullnose End	RE-Rolled End	OE-Open End				
2"	2"	2"	2"	18"	6-1513	0.5	34.00
3"	3"	3"	3"	18"	6-1514	0.5	34.00
4"	4"			36"	6-1510-BE	1.3	50.00
4"		3-7/8"		36"	6-1510-RE	1.3	50.00
4"			4"	36"	6-1510-OE	1.3	50.00
5"	4-7/8"			36"	6-1515-BE	2	62.00
5"		4-3/4"		36"	6-1515-RE	2	62.00
5"			5"	36"	6-1515-OE	2	62.00
6"	5-3/4"			36"	6-1511-BE	3.5	73.00
6"		5-5/8"		36"	6-1511-RE	3.5	73.00
6"			6"	36"	6-1511-OE	3.5	73.00
8"	7-3/4"			36"	6-1512-BE	5	90.00
8"		7-5/8"		36"	6-1512-RE	5	90.00
8"			8"	36"	6-1512-OE	5	90.00
10"	9-3/4"			36"	6-1469-BE	7	114.00
10"		9-5/8"		36"	6-1469-RE	7	114.00
10"			10"	36"	6-1469-OE	7	114.00

**PRESSURE GAUGES,
2-1/2" & 4" DIAL FACES**

For Irrigation Water



Dry (2-1/2" Dial Face)

#0-30 PSI Dry	2-1/2"	6-9768	0.3	22.00
#0-100 PSI Dry		6-1520	0.3	6.00
#0-200 PSI Dry		6-1521	0.3	6.00

Liquid Filled (2-1/2" Dial Face)

#0-15 PSI Liquid Filled	2-1/2"	6-9754	0.3	22.00
#0-30 PSI Liquid Filled		6-9755	0.3	22.00
#0-60 PSI Liquid Filled		6-9756	0.3	22.00
#0-100 PSI Liquid Filled		6-9757	0.3	22.00
#0-160 PSI Liquid Filled		6-1522	0.3	22.00
#0-200 PSI Liquid Filled		6-9758	0.3	22.00
#0-300 PSI Liquid Filled		6-9759	0.3	22.00

Liquid Filled (4" Dial Face)

#0-15 PSI Liquid Filled	4"	9-5271		31.00
#0-30 PSI Liquid Filled		9-5274		31.00
#0-60 PSI Liquid Filled		9-5276		31.00
#0-100 PSI Liquid Filled		9-5270		31.00
#0-160 PSI Liquid Filled		9-5272		31.00
#0-200 PSI Liquid Filled		9-5273		31.00
#0-300 PSI Liquid Filled		9-5275		31.00

For Liquid Manure **For Liquid Manure (2-1/2" Dial Face):**



#0-160 PSI - Dry	2-1/2"	6-1578	1.0	50.00
#0-200 PSI - Liquid Filled		6-9570	1.0	90.00

- 1/4" brass male pipe thread base
- stainless steel case
- silicone filled gauge (on the liquid filled gauges)
- glass lens