





WHY WAIT ON Custom Built Fittings

Fast, Low Cost Custom Built Irrigation & Industrial Fittings

Available in:

- Steel Powder Coat
 - Steel Galvanized
 - Aluminum
 - Cast Aluminum
 - PVC
 - Stainless Steel #304
- 

Call, fax, or email your drawing, and
we will send you a price.



Section Two



Towline / Wheelmove

Tow Line Parts

Hose Adapters

Hose







Hose Clamps

Wheel Move

**Wheel Line Technical
Data**

TOW LINE PARTS



Product	Description	Part Number	Weight	List Price
TOW COUPLER  All steel construction, zinc plated. Includes 2 Gaskets, 1 Quick Drain and 4 Half-Moon Pins.	4"	3-0310	6.25	22.00
TOW COUPLER EAR  Made of formed steel. Welds to coupler body and holds half moon pin.	3/8"	3-0320	0.3	0.50
TOW COUPLER SKID PAN  Formed steel wear pan. Welds to bottom of coupler body.	----	3-0330	0.6	2.00
QUICK DRAIN  Fits into bottom of coupler body to drain line when shut down. Cotter pin is included.	----	3-0340	0.04	1.50
GASKET, LINDSAY  Specify Drain or Non-Drain Fit coupler and stabilizer. Stabilizer must have Non-Drain Gasket.	4" Drain 4" Non-Drain	3-0350 6-1614	0.25 0.25	2.00 1.70
TOW LINE PIPE 	4" x 40'	3-0380	39.0	152.00
Aluminum. Comes with Half-Moon Pins, Straps & Bolts installed.				

HALF MOON CLAMP

4"

3-0410

0.9

1.30



Galvanized steel.
Attaches pipe to coupler with tow pins.

HALF MOON BOLT & NUT

Bolt: 5/16" x 5/8"
Nut: 5/16"

3-0420
3-0430

0.05
0.05

0.06
0.03



Washer included with bolt.

HALF MOON STRAP

1"

3-0440

0.15

0.20



Galvanized.
Bolts to back side of half moon clamp to prevent clamp from pulling off of pipe.

HALF MOON PIN

3/8"

3-0450

0.13

1.20



Hardened steel, plated.
Connects tow line pipe to coupler and stabilizer.

CLOSE NIPPLE

1"

3-0480

0.2

1.00



Black steel.

RISERS

1" Steel tubing.
3/4" Female x 1" Male.

6" F-M

3-0465

0.5

4.90

12" F-M

3-0460

0.9

5.80

18" F-M

3-0466

1.0

6.70

24" F-M

3-0461

1.4

7.50

30" F-M

3-0467

1.5

8.40

36" F-M

3-0468

2.0

9.30

40" F-M

3-0462

2.0

10.20

48" F-M

3-0469

2.1

11.50

60" F-M

3-0463

2.9

13.00

72" F-M

3-0464

3.4

15.00

1" Steel tubing.
1" Male x 1" Male.

12" M-M

3-0470

.9

5.80

24" M-M

3-0471

1.4

7.50

40" M-M

3-0472

2.0

10.20

60" M-M

3-0473

2.9

13.00

72" M-M

3-0474

3.4








15.00



Towline / Wheelmove


TOW LINE PARTS



Product	Description	Part Number	Weight	List Price
STABILIZER  All steel construction. Fit into tow line with half moon pins. Includes gaskets and pins.	Short: 4"x40'	3-0510	77.0	195.00
	Tall: 4"x60'	3-0520	118.0	205.00
STABILIZER CONVERSION KIT  Includes gaskets and pins.	4"	3-0530	25.0	102.00
TOW PLUG  Fits into end coupler of tow line as hitch for towing.	4"	3-0540	5.5	16.00
TRI-POD  All steel construction. Comes complete with Bolts & Nuts. Fits on riser to stabilize end of tow line while watering.	----	3-0550	5.0	26.00
SHUT-OFF VALVE  Order a 1" Close Nipple with this valve. Installed between end coupler and riser.	1"	3-0560	1.2	15.00
CENTER CARRIER 	----	3-0610	5.0	9.00
CHAIN  Horizontal Working Load Limit = 880 lbs.	5/0 Size, Plated	3-0640	0.5/ft	2.50/ft

**3 SEGMENT COUPLING,
SURE GRIP**


4"	9-5844	\$785.00
4-1/2"	9-5845	805.00
5"	9-5846	950.00
6"	6-9659	650.00
8"	9-5207	1050.00

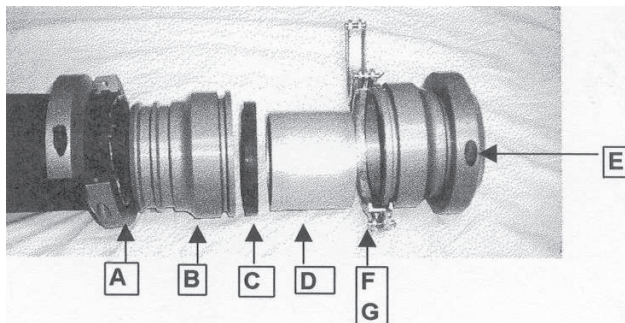

*includes everything shown above
*Can be pulled with water inside hose.

Towline / Wheelmove

**3 SEGMENT HOSE
FITTINGS**



FRL	4"	Alum	6-9506	108.00
MRL	4"	Alum	6-9507	10200
FRL	5"	Alum	6-9504	172.00
MRL	5"	Alum	6-9505	166.00
FRL	6"	Alum	6-9502	236.00
MRL	6"	Alum	6-9503	228.00
FRL 10 ga.	6"	Steel Gal.	6-9500	335.00
MRL 10 ga.	6"	Steel Gal.	6-9501	329.00

*includes 3 segment clamp

*Cannot be pulled with water inside hose.

**3 SEGMENT FULL
ADAPTER, ALUM**



*includes 3 segment clamp

4"	6-9889	248.00
4-1/2"	6-9656	255.00
5"	6-9657	311.00
6"	6-9658	328.00
8"	9-5246	625.00

**3 SEGMENT HALF
ADAPTER
(HARD MENDER)**



* Weld-on
* Includes 3 segment clamp

Steel:				
4"	Steel	6-9648	76.00	
4-1/2"	Steel	6-9649	210.00	
5"	Steel	6-9650	95.00	
6"	Steel	6-9651	249.00	
8"	Steel	9-5877	325.00	
Aluminum:				
4"	Alum	6-9652	78.00	
4-1/2"	Alum	6-9653	128.00	
5"	Alum	6-9654	140.00	
6"	Alum	6-9655	195.00	
8"	Alum	9-5247	380.00	

3 SEGMENT CLAMP




*3 piece clamp


4"	6-9608	47.00
4-1/2"	6-9609	122.00
5"	6-9610	122.00
6"	6-9611	122.00
8"	9-5184	206.00


HOSE ADAPTERS




Product	Description	Part Number	Weight	List Price
MALE END, STEEL BLACK 	2"	3-0601	--	9.50
	2-1/2"	9-5014	--	9.50
	3"	3-0602	--	9.50
	4"	3-0603	--	9.50
	4-1/2"	3-0604	--	12.50
	5"	3-0605	--	12.00
	6"	3-0606	--	13.00
	8"	3-0607	--	24.50
	10"	3-0608	--	35.00
	12"	3-0609	--	43.00

Weld-on.


MALE END, ALUMINUM 	3"	.050	3-0641	1.0	18.00
	4"	.072	3-0652	1.0	21.00
	5"	.078	3-0642	1.0	23.00
	6"	.058	3-0643	1.0	23.00
	8"	.064	3-0644	1.0	24.00


MALE END, THICK ALUMINUM  small barbs	4"		3-0636		42.00
	4-1/2"		3-0637		45.00
	5"		3-0638		51.00
	6"		3-0639		52.00


*4 1/2" long & 1/4" thick
*with small barbs (as shown) or spaced barbs

HOSE SPLICE, ALUMINUM 	3"	.050	3-0645	1.0	27.00
	4"	.072	3-0653	1.0	29.00
	5"	.078	3-0646	1.0	31.00
	6"	.058	3-0647	1.0	30.00
	8"	.064	3-0648	1.0	32.00

* Applications:
* PVC layflat for drip irrigation
* Rubber discharge hose for medium pressure irrigation

NIPPLE, KING - MALE THREAD x BARB 	1/2"		6-7000	.14	1.10
	3/4"		6-7001	.20	1.20
	1"		6-7002	.32	1.70
	1-1/4"		6-7003	.56	2.50
	1-1/2"		6-7004	.72	2.80
	2"		6-7005	1.10	3.10
	2-1/2"		6-7006	1.74	4.70
	3"		6-7007	2.14	6.20
	4"		6-7008	3.06	10.30
	5"		6-7009	4.12	22.00
	6"		6-7010	12.24	30.00
	8"		6-7011	16.44	49.00
	10"		6-7012	--	116.00
12"		6-7013	--	160.00	

HOSE ADAPTER, FEMALE RL 	3"		6-8050		19.00
	4"		6-8051		25.00
	5"		6-8052		32.00
	6"	12 ga.	3-0681	6.5	37.00
	8"	12 ga.	3-0683	10.5	57.00
	10"	12 ga.	3-0679		83.00
	12"	12 ga.	3-0664		100.00

HOSE ADAPTER, MALE RL 	3"		6-8053		18.00
	4"		6-8054		24.00
	5"		6-8055		31.00
	6"	12 ga.	3-0680	7.0	35.00
	8"	12 ga.	3-0682	11.0	51.00
	10"	12 ga.	3-0678		69.00
	12"	12 ga.	3-0663		90.00

HOSE ADAPTER, B & H



* Steel Galvanized

Hose Barb x Male B & H 2"	6-8060	25.00
Hose Barb x Male B & H 3"	6-8061	28.00
Hose Barb x Male B & H 4"	6-8062	32.00
Hose Barb x Male B & H 5"	6-8063	49.00
Hose Barb x Male B & H 6"	9-5322	60.00
Hose Barb x Female B & H 2"	6-8056	22.00
Hose Barb x Female B & H 3"	6-8057	25.00
Hose Barb x Female B & H 4"	6-8058	28.00
Hose Barb x Female B & H 5"	6-8059	41.00
Hose Barb x Female B & H 6"	9-5321	47.00

HOSE REPAIR



* Steel Galvanized


2"	6-8064	19.00
3"	6-8065	22.00
4"	6-8066	23.00
5"	6-8067	36.00
6"	6-8068	39.00
8"	6-8069	59.00

HOSE MENDER, PLATED STEEL



1/2"	9-6835	4.00
3/4"	9-6836	4.50
1"	9-6837	5.00
1-1/4"	9-6838	6.50
1-1/2"	9-6839	7.00
2"	9-6840	7.50
2-1/2"	9-6841	10.50
3"	9-6842	11.00
4"	9-6843	14.00
5"	9-6844	95.00
6"	9-6845	41.00
8"	9-6846	99.00
10"	9-6847	189.00
12"	9-6848	325.00

TOW HOSE



MM-Male end x Male end
MF-Male end x Female end
Completely assembled to ins.
Other lengths available upon

Maximum: #125 psi
Connects tow line to mainline.
Both ends Male with hook & band.
*For other than standard fittings, add \$5.00/end to price.

4" x 17'	3-0650	24.0	199.00
4" x 12'	3-0655	17.0	158.00

BAND-IT TOOL




6-9093	--	145.00
--------	----	--------

Product	Description	Part Number	Weight	List Price
---------	-------------	-------------	--------	------------

PREFORMED JUNIOR ADAPTER

6-9094 -- 215.00



*For use with above tool on preformed clamps

BANDING, 5/8" STAINLESS STEEL

*100'/box 6-9095 -- 110.00



* other sizes are available, please call.

BAND-IT BUCKLE, 5/8"

*100'/box 6-9096 -- 75.00



* For use with above 5/8" banding

PREFORMED CLAMP

J215	3/4" wide x 5" ID	6-9097	--	7.00
J216	3/4" wide x 6" ID	6-9098	--	8.00



*For use with above tool and jr.adapter
*Stainless Steel

GLUE FOR HOSE FITTINGS



1 Quart Pliobond #20 9-6778 -- 45.00

WHEEL MOVE, COMPLETE




4" x 1280'
5" x 1280'

5-0160
5-0161

Call
Call

Call
Call

WHEEL MOVE COUPLER SET, CAST



4" Press-on
5" Weld-on

5-0167
5-0168

8.0
6.3

72.00
79.00

SPRINKLER LEVELER



3/4"

5-0165

2.4

13.00

LEVELER ELBOW



1" x 3/4"

5-0166

1.0

6.50

WHEELS



Distance # of Turns

		4'	4" x 48" 18 ga.	5-0170	38.0	88.00
		4'	5" x 48" 18 ga.	5-0171	38.0	88.00
60'	4	5'	4" x 58" 18 ga.	5-0172	42.0	72.00
60'	4	5'	5" x 58" 18 ga.	5-0173	42.0	72.00
50'	3	6'	4" x 64" 18 ga.	5-0174	44.0	78.00
50'	3	6'	5" x 64" 18 ga.	5-0175	44.0	78.00
60'	3	7'	4" x 76" 18 ga.	5-0176	56.0	99.00
60'	3	7'	5" x 76" 18 ga.	5-0177	56.0	99.00
50'	2	8'	4" x 96" 16 ga.	5-0178	78.0	203.00
50'	2	8'	5" x 96" 16 ga.	5-0179	78.0	203.00
60'	2	10'	4" x 120" 16 ga.	5-0180	113.0	322.00
60'	2	10'	5" x 120" 16 ga.	5-0181	113.0	322.00

WIND BRACE



4" x 5'
4" x 6-7'

5-0182
5-0183

8.3
9.8

70.00
80.00

5" x 5'
5" x 6-7'

5-0184
5-0185

8.9
9.8


70.00
80.00

Towline / Wheelmove

DISCHARGE HOSE



Product	Description	Part Number	Weight	List Price	
DISCHARGE HOSE, BLACK RUBBER (HIGH PRESSURE)	Flat Measurement				
	1-1/2"	300 max psi	2-1/2"	3-0590	0.20/ft 4.70/ft
	2"	300 max psi	3-3/16"	3-0591	0.30/ft 3.80/ft
	2-1/2"	300 max psi	4"	3-0592	0.40/ft 5.60/ft
	3"	300 max psi	4-7/8"	3-0593	0.50/ft 7.50/ft
	4"	200 max psi	6-1/4"	3-0651	1.10/ft 9.00/ft
	4-1/2"	200 max psi	7-1/8"	3-0584	1.00/ft 17.00/ft
	5"	200 max psi	7-7/8"	3-0597	1.20/ft 13.00/ft
	6"	200 max psi	10"	3-0670	1.72/ft 14.00/ft
	8"	150 max psi	13"	3-0671	2.92/ft 24.00/ft
	10"	55 max psi		3-0585	3.54/ft 62.00/ft
	12"	46 max psi		3-0586	10.8/ft 62.00/ft
	16"	34 max psi		9-6850	79.00/ft

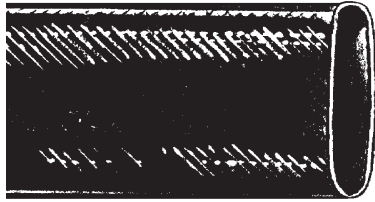


Black

Features:

1. Ideal for wheelline systems
2. Black rubber covering
3. Sized for use with irrigation fittings
4. Lightweight and flexible
5. Abrasion, UV, and kink resistant
6. Heavy duty discharge for use as a mainline for water and liquid manure, or agricultural and industrial sludge


DISCHARGE HOSE, ORANGE PVC (MEDIUM PRESSURE)

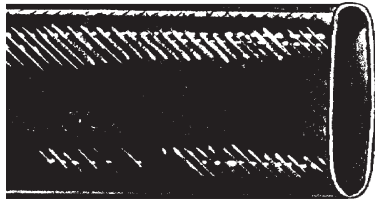

Orange - Red

1-1/2"	150 max psi	3-0570	.23	1.00/ft
2"	150 max psi	3-0571	.32	1.50/ft
2-1/2"	150 max psi	3-0572	.41	1.75/ft
3"	150 max psi	3-0573	.52	2.60/ft
4"	125 max psi	3-0574	.76	3.60/ft
6"	115 max psi	3-0575	1.21	6.40/ft
8"	70 max psi	3-0576	1.62	12.00/ft

DISCHARGE HOSE, BLUE PVC (LOW PRESSURE)

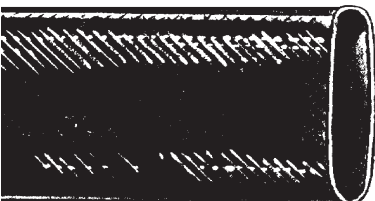


Blue

1-1/2"	70 max psi	3-0598	.17/ft	.50/ft
2"	65 max psi	3-0594	.20/ft	1.00/ft
2-1/2"	60 max psi	3-0599	.26/ft	.80/ft
3"	60 max psi	3-0595	.32/ft	2.00/ft
4"	60 max psi	3-0596	.45/ft	2.50/ft
5"	40 max psi	9-6817	.64/ft	3.30/ft
6"	45 max psi	3-0580	.75/ft	2.30/ft
8"	45 max psi	3-0581	1.14/ft	5.00/ft
10"	35 max psi	3-0582	2.00/ft	15.00/ft
12"	30 max psi	3-0583	2.50/ft	21.00/ft
14"	30 max psi	6-9930	2.70/ft	31.00/ft
16"	30 max psi	6-9931	3.08/ft	45.00/ft

Features:

1. Ideal for drip irrigation
2. No pig tailing
3. No snaking
4. Twisted yarn assures stability throughout the length of hose
5. Allows many times of use with the convenience of easy coiling for storage


**SUCTION HOSE,
CURROGATED PVC
(RIGHT SPIRAL)**

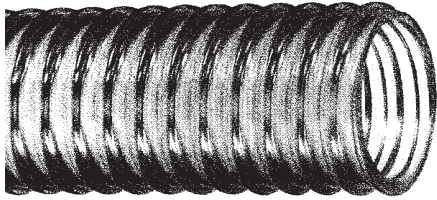

ID	OD			
1-1/2"	1.87"	6-0807	.58	2.00/ft
2"	2.41"	6-0808	.55	2.90/ft
2-1/2"	2.87"	3-0900	--	3.50/ft
3"	3.54"	6-0809	1.07	5.90/ft
4"	4.65"	3-0672	1.68	8.50/ft
5"	5.73"	3-0675	4.26	15.20/ft
6"	6.98"	3-0673	3.10	18.50/ft
8"	9.14"	3-0674	6.57	29.00/ft
10"	11.30"	3-0901	10.00	67.00/ft
12"	13.31"	3-0902	12.00	85.00/ft


Towline / Wheelmove

**SUCTION HOSE,
SMOOTH PVC**

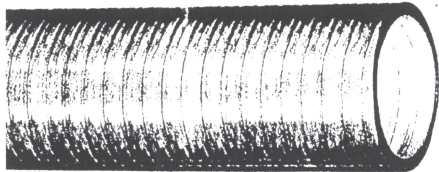


ID	OD			
1-1/2"	1.82"	6-0010	.47	2.20/ft
2"	2.34"	6-0011	.67	3.20/ft
2 1/2"	2.88"	6-9929		3.30/ft
3"	3.40"	6-0012	1.23	4.50/ft
4"	4.44"	6-0013	1.89	5.00/ft
5"	5.65"	6-0014	3.03	13.20/ft
6"	6.56"	6-0015	4.48	11.50/ft
8"	8.95"	6-0016	6.90	25.20/ft
10"	11.34"	3-0903	12.00	72.00/ft
12"	13.39"	3-0904	16.00	87.00/ft

**SUCTION HOSE, BLACK
RUBBER**

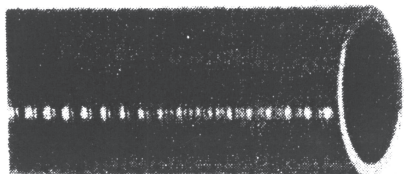

ID	OD	DB	Clamp#	Max PSI			
1-1/2"	1.89"	-	-	150	6-0800	1.00	4.80/ft
2"	2.40"	-	-	150	6-0801	1.25	5.50/ft
3"	3.46"	400	-	150	6-0802	2.10	6.50/ft
4"	4.49"	525	-	150	6-0803	3.10	11.00/ft
5"	5.55"	639	-	150	6-0804	4.20	21.00/ft
6"	6.54"	769	-	75	6-0805	5.00	21.00/ft
8"	8.70"	875	-	75	6-0806	7.25	34.00/ft
10"	10.71"	1125	-	45	3-0905	8.95	46.00/ft
12"	12.80"	1360	-	90	3-0906	14.30	90.00/ft

Product	Description	Part Number	Weight	List Price
T-BOLT HOSE CLAMP (ZINC PLATED-GOLD)	Millimeters	Inches		Box Qty
	26-28	1.02-1.10	0.75" Suction 3-0703	.15 100 2.00
	29-31	1.14-1.22	1.0" Discharge 3-0704	.16 100 2.50
	32-35	1.26-1.38	1.0" Suction 3-0705	.17 100 2.50
	36-39	1.42-1.54	3-0706	.18 100 2.70
	40-43	1.57-1.69	1.5" Discharge 3-0708	.18 100 4.20
	44-47	1.73-1.85	9-5433	.18 100 5.00
	48-51	1.89-2.01	1.5" Suction 3-0709	.19 100 4.50
	52-55	2.05-2.17	2.0" Discharge 3-0710	.19 50 4.60
	56-59	2.20-2.32	9-5434	.19 50 4.60
	60-63	2.36-2.48	2.0" Suction 3-0712	.20 50 6.20
	64-67	2.52-2.64	3-0713	.20 50 6.20
	68-73	2.68-2.87	2.5" Discharge 3-0714	.38 50 6.40
	74-79	2.91-3.11	2.5" Suction 3-0715	.40 50 6.40
	80-85	3.15-3.35	3.0" Discharge 3-0716	.41 50 6.50
	86-91	3.39-3.58	3.0" Suction 3-0717	.42 50 6.50
	92-97	3.62-3.82	9-5435	.42 50 8.50
	98-103	3.86-4.06	3-0719	.44 50 6.60
	104-112	4.09-4.41	4.0" Discharge 3-0660	.47 50 7.00
	113-121	4.45-4.76	4.5" Suction 3-0720	.49 25 7.00
	122-130	4.80-5.12	4.0" 3-0721	.49 25 9.50
	131-139	5.16-5.47	5.0" Discharge 3-0722	.66 25 9.50
	140-148	5.51-5.83	5.0" Suction 3-0723	.68 25 10.00
	149-161	5.87-6.34	6.0" Discharge 3-0661	.71 25 10.00
	162-174	6.38-6.85	6.0" Suction 3-0724	.77 25 11.00
	175-187	6.89-7.36	(For 6" Suction Boot) 3-0725	.86 25 11.00
	188-200	7.40-7.87	3-0726	.89 25 11.50
	201-213	7.91-8.39	8.0" Discharge 3-0662	.93 25 12.00
214-226	8.43-8.90	(For 8" Suction Boot) 3-0727	.97 25 13.50	
227-239	8.94-9.41	3-0728	.98 25 13.50	
240-252	9.45-9.92	8.0" Suction 3-0729	1.04 25 15.00	
256-268	10.08-10.55	10" Discharge 6-9556	15.00	
308-320	12.13-12.60	12" Discharge 6-9557	16.00	
358-370	14.10-14.57	14" Discharge 6-9558	17.00	
408-420	16.06-16.54	16" Discharge 6-9559	18.00	



Zinc Plated Band, Bolt & Nut

Features:


1. Double Galvanization
2. Allen screws allow for tightening in the points where there are space problems
3. Thorough spot welding with high resistance to corrosion
4. Use in agriculture, industry, construction, and wastewater
5. Can be used many times over
6. High resistance to corrosion

HOSE CLAMP, RED

* Designed for High Pressure 6" Hose and 6" 10 ga. hose adapters.
Instructions Included.

6" 3-0700 **29.00**

DOUBLE BOLT CLAMP



3"	# 400	3.5"-3.81"	9-5801	12.00
4"	# 463	4.06"-4.44"	3-0730	1.8 7.00
4-1/2"	# 525	4.25"-4.94"	9-5802	17.00
5"	#550	5.00"-5.50"	9-5864	17.00
5-1/2"	#600	5.50"-6.06"	9-5865	17.00
6"	# 675	6.13"-6.88"	3-0731	2.7 12.00
6-1/2"	# 769	6.50"-7.56"	9-5803	22.00
7-7/8"	#818	7.69"-8.19"	9-5866	22.00
8"	# 875	8.25"-8.88"	3-0732	5.6 19.00
9"	# 988	8.94"-9.88"	9-5804	38.00
10"	# 1125	9.94"-11.38"	3-0733	8.0 38.00
12"	# 1275	11.19"-13.00"	3-0734	10.0 43.00
13"	# 1360	12.19"-14.00"	9-5805	105.00
14-1/2"	#1450	13.19"-15.00"	9-5867	50.00
17"	#1700	15.06"-17.50"	9-5868	105.00

DOUBLE BOLT SPIRAL CLAMP (RIGHT HAND SPIRAL)



1.5"	9-5001	2.00
2"	6-9745	5.00
2.5"	9-5003	1.1 10.00
3"	6-9746	1.6 7.00
4"	3-0800	2.1 9.00
5"	3-0801	2.9 12.00
6"	3-0802	9.00
8"	3-0803	10.00
10"	9-5000	20.00
12"	9-5002	22.00

**T-BOLT HOSE CLAMP
(STAINLESS STEEL)**



* Ideal for use on waste water and liquid handling hose fittings.

- All stainless steel.
- 3/4" wide x .025 thick
- 300 Seires Stainless Steel band with Stainless steel bolt.
- A strong, positive method of assembling hose, duct connections, tubing, and component parts. They are used for high torque applications where ordinary hose clamps fail. They provide a 360 degree sealing surface by using a shoe or formed bridge. Nuts are self-locking, vibration resistant with nylon inserts.

Millimeters	Inches			
29-31mm	1.14-1.22	1.0" Discharge	6-9518	5.00
32-35mm	1.26-1.38	1.0" Suction	6-9519	5.00
36-39mm	1.42-1.54		6-9520	5.00
40-43mm	1.58-1.69	1.5" Discharge	6-9521	5.00
44-47mm	1.73-1.85		6-9522	7.00
48-51mm	1.89-2.01	1.5" Suction	6-9523	7.00
52-55mm	2.05-2.17	2.0" Discharge	6-9524	7.00
56-59mm	2.21-2.32		6-9525	7.00
60-63mm	2.36-2.48	2.0" Suction	6-9526	7.00
64-67mm	2.52-2.64		6-9527	7.00
68-73mm	2.68-2.88	2.5" Discharge	6-9528	9.00
74-79mm	2.91-3.11	2.5" Suction	6-9529	9.00
80-85mm	3.15-3.35	3.0" Discharge	6-9530	9.00
86-91mm	3.39-3.59	3.0" Suction	6-9531	9.00
92-97mm	3.62-3.82		6-9532	9.00
98-103mm	3.86-4.06		6-9533	9.00
104-115mm	4.10-4.53	4.0" Discharge	6-9534	11.00
113-121mm	4.45-4.77	4.0" Suction	6-9535	11.00
122-130mm	4.81-5.12		6-9536	11.00
131-139mm	5.16-5.48	5.0" Discharge	6-9537	11.00
140-148mm	5.52-5.83	5.0" Suction	6-9538	14.00
149-161mm	5.87-6.34	6.0" Discharge	6-9539	14.00
162-174mm	6.38-6.86	6.0" Suction	6-9540	13.00
175-187mm	6.90-7.37	(For 6" Suction Boot)	6-9541	15.00
188-200mm	7.41-7.88		6-9542	15.00
201-213mm	7.92-8.39	8.0" Discharge	6-9543	15.00
214-226mm	8.43-8.90	(For 8" Suction Boot)	6-9544	17.00
226-239mm	8.90-9.42		6-9545	17.00
240-252mm	9.46-9.93	8.0" Suction	6-9546	17.00
252-265mm	9.93-10.44		6-9547	17.00

Towline / Wheelmove

**OETIKER® CLAMP
(SINGLE EAR)**



- Oetiker ear type clamps "Breathe" and adapt to the expansion and contraction of hose affected by thermodynamics or aging, no need to retighten
- Clamps are lightweight and compact, important when bulky screw-type clamps interfere with limited space applications
- Provides a tamper-proof seal without damage to the hose
- Made of zinc plated 1008/1010 carbon steel
- Features a mechanical lock at the joint instead of a spotweld, preventing failure due to corrosion
- Low pressure applications

	3/8"	.350-.414	9-6779	0.30
	7/16"	.381-.444	9-6780	0.30
	15/32"	.394-.486	9-6781	0.30
	1/2"	.453-.524	9-6782	0.30
	35/64"	.472-.551	9-6783	0.40
	9/16"	.496-.571	9-6784	0.40
	5/8"	.543-.618	9-6785	0.40
	21/32"	.547-.650	9-6786	0.40
	11/16"	.594-.669	9-6787	0.40
	23/32"	.618-.728	9-6788	0.40
	3/4"	.669-.779	9-6789	0.40
	13/16"	.716-.827	9-6790	0.40
	7/8"	.779-.890	9-6791	0.40
	15/16"	.839-.949	9-6792	0.40
	1"	.898-1.008	9-6793	0.40
	1-1/16"	.945-1.067	9-6794	0.40
	1-1/8"	1.004-1.126	9-6795	0.40
	1-3/16"	1.063-1.185	9-6796	0.40
	1-5/16"	1.181-1.303	9-6797	0.50
	1-3/8"	1.240-1.362	9-6798	0.50
	1-15/32"	1.358-1.480	9-6799	0.50
	1-9/16"	1.437-1.559	9-6800	0.50
	1-5/8"	1.492-1.614	9-6801	0.50
	1-11/16"	1.551-1.673	9-6802	0.50
	1-23-32"	1.610-1.732	9-6803	0.50
	1-3/4"	1.669-1.791	9-6804	0.60
	1-13/16"	1.728-1.850	9-6805	0.60
	1-7/8"	1.787-1.909	9-6806	0.60
	1-15/16"	1.846-1.968	9-6807	0.60
	2"	1.905-2.028	9-6808	0.60

**OETIKER® PINCH CLAMP
TOOL**



9-6809

41.80